

# 1x4 Single Mode Narrowband Fused Splitter



## Features / Benefits

- Compact package
- Low excess loss
- Low polarization dependent loss

## Applications


- Optical communication system
- Optical power distribution system
- Fiber optic sensors
- Optical test system

## Specifications

Parameter		Unit	25 : 25 : 25 : 25	
			Premium	A grade
Bandwidth		nm	± 10	
Insertion Loss	Max.	dB	6.7	7.2
Excess Loss	Typ.	dB	0.2	0.3
Uniformity	Max.	dB	1.0	1.4
PDL	Max.	dB	0.12	0.15
Return Loss	Min.	dB	50	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	

Note: Return loss without connector; insertion loss does not include connector

## Ordering Information

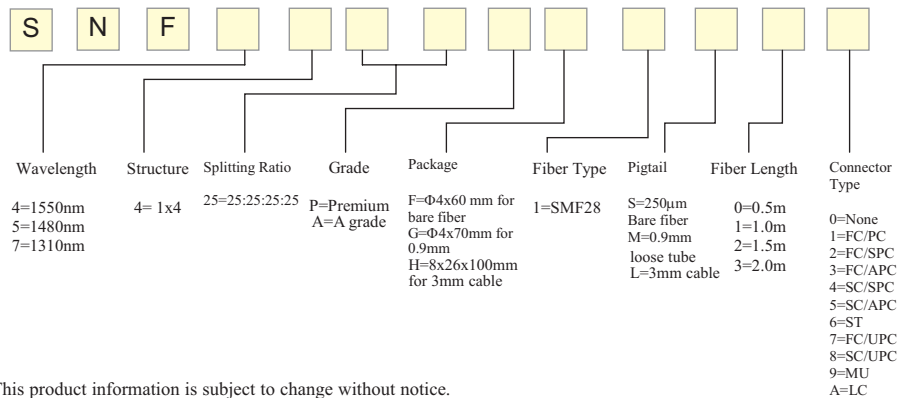

This product information is subject to change without notice.